


HIGH EFFICIENT
LED STREET LIGHTS

Aerolite LSL[®] 15



- Extremely low consumption, only 14 watts
- Cutting edge light performance
- Most aerodynamic robust housing for excellent durability
- Uniquely optimized heat dissipation extends life time
- Suitable for smaller roadways, private drive-ins, walking paths, bicycle lanes

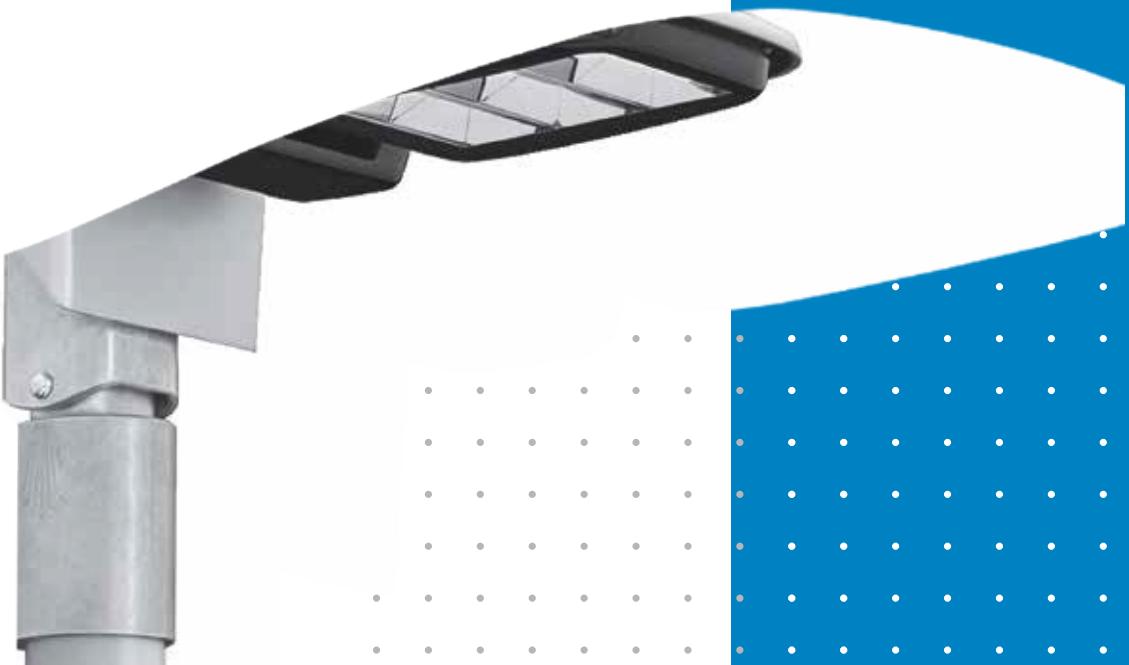

GRAH[®]
LED LIGHTING

Aerolite LSL® 15

Aerolite LSL® 15 excellent performance
with best quality - price ratio



Patented Aerolite LSL15 are one of the only LED street lights in the world produced under highest automotive production standard ISO/TS 16949.

Top quality materials, guaranteed lifetime, unique design, high energy efficiency and excellent lighting performance bring you numerous advantages for affordable price.



GRAH revolutionary 360° APPROACH™ to LED street lighting

By combining know-how and expertise from LED technology with our own integrated 360° APPROACH™, every single component of the luminaire is studied and constantly optimized from a totally new perspective to achieve unique innovative solutions, which are successfully solving all the challenges and are setting new standards in LED street lighting.

Aerolite LSL® 15 - main characteristics:




- Luxeon Rebel LED top quality, awarded LEDs
- LED GENION LED optimized LED modules exploiting every LED for excellent durability to the fullest extent
- QUADRUM opt. FULL CUTOFF optics (IES and IDA standards) with high efficient reflectors directs light beams exactly where it is needed, reflecting feature reducing maintenance costs achieving cutting edge light performance
- INFINITY driver customized, intelligent driver for optimal operation with ultra energy efficient output
- MATRIX 3D light unique light shape with asymmetric distribution from 1-10V (without multilevels regulation) luminosity for best possible light uniformity / optimal coverage of surfaces
- COOLVERT uniquely optimized heat dissipation extends lifetime and preserves light performance
- AEROCOMPACT housing most aerodynamic, ultra slim luminaire with robust housing from aluminum alloy enabling increased performance and extended lifetime
- ULTRA COATING life time multi-layer protection of LED housing for excellent durability
- ALL WEATHER RESISTANCE IP66 ingress protection rate AND IMPACT RESISTANCE IK08 impact rate
- complete electronic control of activity and LED light sources
- ability to regulate light from 100% with a rudder
- produced under strictest standards: Automotive ISO/TS 16949
- 100% made in European Union
- environmentally friendly ECO technology
- prepared for a seamless upgrade of the system for different multifunction options

MOUNTING


- fast and universal mounting to a lamp post with a diameter of 60 or 76 mm
- alternative mounting concepts possible on request
- possibility of setting the angle of mounting in the range of -15° to $+15^{\circ}$
- the light can be adjusted in the horizontal position – swing
- recommended mounting height is 3 - 5 m

APPLICATION


- smaller roadways, private drive-ins
- wherever the required level of illumination is 5lx (S4 street category)
- suitable for parking lots, walking paths, bicycle lanes

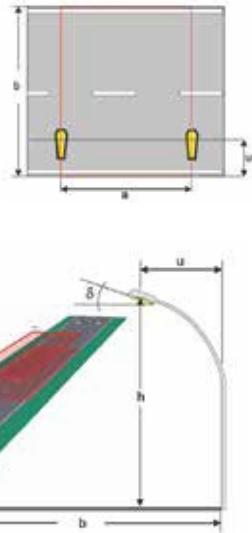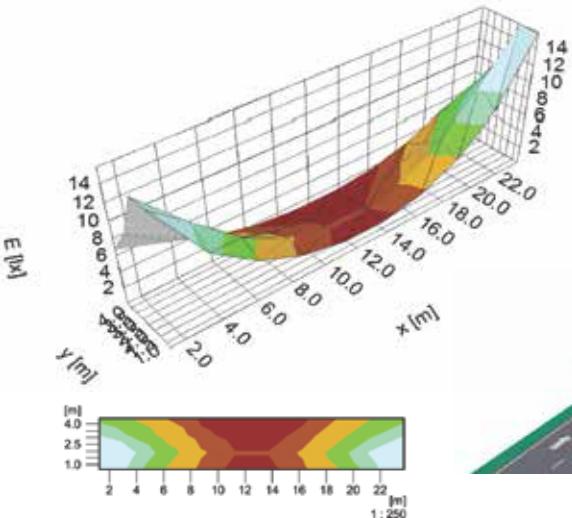

Asymmetric, LS, 1400lm



Asymmetric, LS, 1800lm



AEROLITE LSL° 15 TECHNICAL DATA

Light source	15 LED high power by Lumileds
Voltage	110 – 250 V (50 - 60 Hz)
Luminaire flux	From 1.400 up to 1.800 lm
Color temperature	4.200 K (other color temperatures on request)
Power consumption	From 14 up to 18 W (depending on lumen package)
Luminous efficiency	100 lm/W
Lifetime	Min. 60.000 hours / up to 100.000 hours
Protection rating	IP66
Temperature range	-30° to +60°C
Working temperature	+55°C
Safety class	Class I or II
Material	Housing: aluminium alloy Housing sealing: silicon, heat resistant Cover: PMMA
Housing color	RAL 9006
Weight	2,95 kg
Dimensions (LxHxW)	430 mm x 200 mm x 130mm



For more information visit
www.grahlighting.com

HIGH EFFICIENT
LED STREET LIGHTS

Aerolite LSL[®] 15

Code / Order No.	Version	Luminaire flux	Power consumption	Driving current	LED type
1820911	Basic (no dimming)	1.400 lm	14 W	280 mA	LS
1820913	Power red.50%				
1820915	Dim. range 1-100%				
1800911	Basic (no dimming)	1.800 lm	18 W	350 mA	LS
1800913	Power red.50%				
1800915	Dim. range 1-100%				

Code / Order No.	Bracket
2601012	Fix angle Ø 60
2601001	Variable angle +/-15 Ø 60
2601011	Variable angle +/-15 Ø 76

Your benefit is our leading priority

We are committed to constant and never ending improvement of people, sources, processes to achieve best possible products' quality, efficiency, performance and bring high added value to satisfy our clients.



Preserving environment for future generations

Our production is without harmful substances and pollution free. We continually seek new ways to improve our activities in order to preserve our environment for future generation.



Trusted partner for leading car manufacturers

Grah Lighting was established as a fully specialized division for the LED street and industrial light program of the company SGA (Schefenacker Grah Automotive – SG Automotive d.o.o.), which is a trusted partner and supplier for leading car manufacturers such as, Mercedes Benz, BMW, Audi, Porsche, Ferrari, Maybach, Rolls Royce, VW, Ford, GM, Nissan, Volvo, Toyota, Cadillac, Chrysler,...



Pioneers of utilizing LED technology with 15 years of experience

Grah Lighting, as the integral part of Grah Group, has more than 15 years of experience in LED technology.

Grah Group is formed by integrated and subsidiary companies of Grah Automotive worldwide, employs more than 1000 people and was one of the first on the market utilizing LED technology in lighting and automotive signalization.



Manufacture:

G R A H
LED LIGHTING

GRAH LIGHTING
SG Automotive d.o.o.

Mestni trg 5b
SI-3210 Sl. Konjice
Slovenia, EUROPEAN UNION
T +386 82 801 424
F +386 82 801 402
info@grahlighting.com
www.grahlighting.com

Distribution:

NICHE LIGHTING
1300 780 565 | info@nichelighting.com.au